

# Rubberized Stop Washer


Rubber stop washers are versatile components for effectively limiting movement. They are preferably used for axial path limitation with Conical Mounts or Bushes. These elastomer-coated washers have different stiffnesses and dampening properties.

## Typical Applications Include:

- Buffers
- Used with the Metacone range for rebound protection
- Universal applications



## TECHNICAL DRAWING

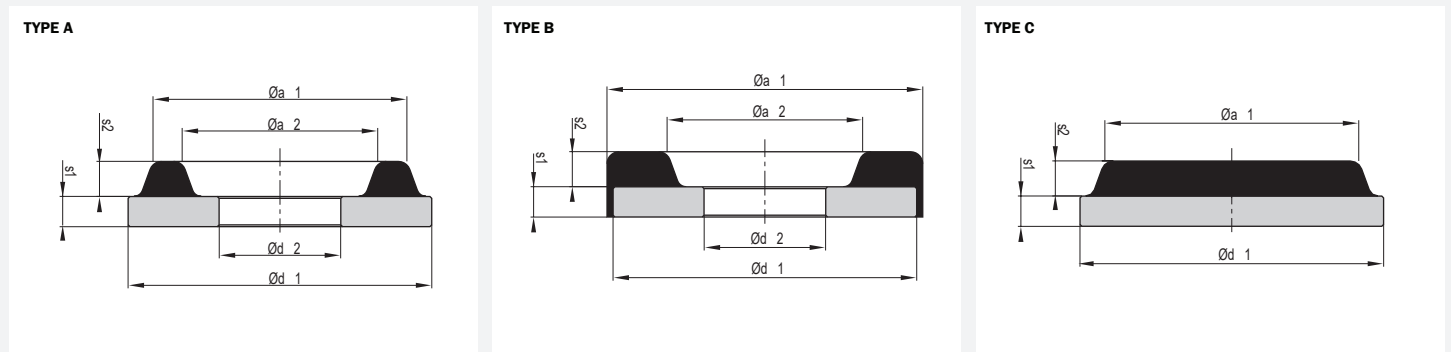

## PRODUCT DATA

DRAWING NO.	PART NO.	HARDNESS	DIMENSIONS (mm)						MAX. LOAD (Kg)
			Ød <sub>1</sub>	Ød <sub>2</sub>	Øa <sub>1</sub>	Øa <sub>2</sub>	S <sub>1</sub>	S <sub>2</sub>	
<b>TYPE A</b>									
039 18 005/101	93127	80 NR 11	49	12.5	44	28	3	3	-
	93950	60 NR 11							
077 18 700/101	511928	60 NR 11	75	16.2	65	47	5	4	-
077 18 707/101	49042823	70 NR 13							
040 18 048/101	90819	60 NR 11	75	20.2	65	47	5	6	-
077 18 007/102	90831	60 NR 11	75	20.2	65	47	4	5	-
	511081	70 NBR 68							
077 18 003/102	90501	60 NR 11	90	24.3	78	60	8	8	-
<b>TYPE B</b>									
077 18 710/101	49035471	70 NR 13	56	16	58	37	5	4	-
077 18 706/101	49042822	70 NR 13	56	21	58	37	5	4	-
19-0563	20-00612	SE 75	50	9	55	24	3	12	150
19-0728	20-00631	SE 250	70	11	75	31.5	4	13	400
19-0729	20-00632	SE 750	110	14	115	49	4	20	1100
<b>TYPE C</b>									
077 18 705/101	60900266	70 NR 13	40	-	32.55	-	5	2	-